


Model 1100 Ultra Precision Series Compression Only (U.S. & Metric)

Why INTERFACE 1100 series load cells are the best in class:

- Proprietary Interface temperature compensated strain gages
- Accuracy to .02%
- High output – to 4mV/V
- Eccentric load compensated
- Low deflection
- .0008%/°F (.0015%/°C) temp effect on output
- Shunt calibration
- High precision base included
- Barometric compensation

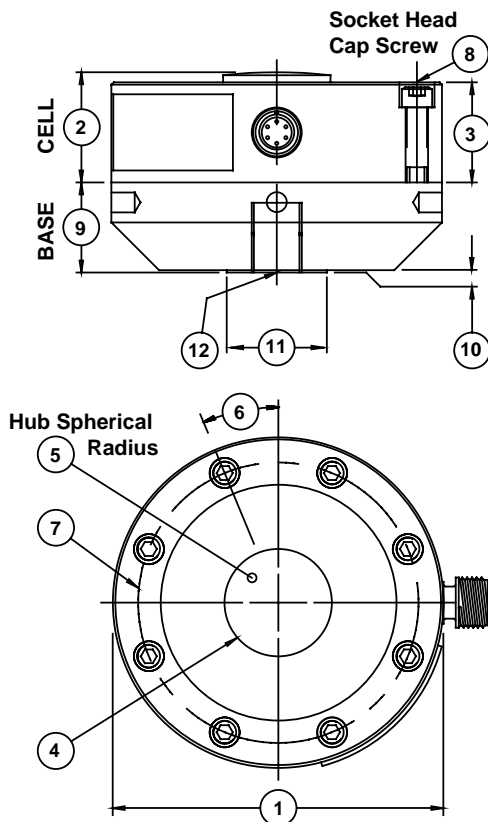

DIMENSIONS				
See Drawing	MODEL			
	1111		1121	
	CAPACITY			
	U.S. (lbf)	Metric (kN)	U.S. (lbf)	Metric (kN)
	1K, 2K, 5K, 10K	5, 10, 25, 50	25K 50K	100 250
	inch	mm	inch	mm
①	4.13	104.8	6.06	153.9
②	1.38	34.9	1.75	44.5
③	1.25	31.7	1.63	41.4
④	1.34	34.0	2.65	67.3
⑤	6.00	152.4	8.00	203.2
⑥	22.5°	22.5°	15.0°	15.0°
⑦	3.52	88.9	5.13	130.3
⑧	8 places		12 places	
⑨	1.13	28.6	1.75	44.5
⑩	0.03	0.80	0.03	0.80
⑪	1.25	31.8	2.25	57.2
⑫	5/8-18 UNF-3B	M-16 X 2-4H	1 1/4-12 UNF-3B	M33 X 2-4H
	.87 in. deep	22.1 mm deep	1.40 in. deep	35.6 mm deep

SPECIFICATIONS

PARAMETERS	MODEL		
	1111	1111	1121
	CAPACITY		
U.S. Models (lbf)	1K, 2K	5K, 10K	25K, 50K
Metric Models (kN)	5, 10	25, 50	100, 250
ACCURACY – (MAX ERROR)			
Static Error Band-% FS	± 0.02	± 0.03	± 0.03
Nonlinearity-% FS	± 0.03	± 0.04	± 0.04
Hysteresis-% FS	± 0.02	± 0.04	± 0.04
Nonrepeatability-% RO	± 0.01	± 0.01	± 0.01
Creep, in 20 min.-%	± 0.025	± 0.025	± 0.025
Side Load Sensitivity-%	± 0.1	± 0.1	± 0.1
Eccentric Load Sensitivity-%/in	± 0.1	± 0.1	± 0.1
TEMPERATURE			
Compensated Range-°F	15 to 115	15 to 115	15 to 115
Compensated Range-°C	-10 to 45	-10 to 45	-10 to 115
Operating Range-°F	-65 to 200	-65 to 200	-65 to 200
Operating Range-°C	-55 to 90	-55 to 90	-55 to 90
Effect on Zero-%RO/°F – MAX	± 0.0004	± 0.0004	± 0.0004
Effect on Zero-%RO/°C – MAX	± 0.0007	± 0.0007	± 0.0007
Effect on Output-%/°F – MAX	± 0.0008	± 0.0008	± 0.0008
Effect on Output-%/°C – MAX	± 0.0015	± 0.0015	± 0.0015
ELECTRICAL			
Rated Output-mV/V (Nominal)	2.0	4.0	4.0
Excitation Voltage-VDC MAX	20	20	20
Bridge Resistance-Ohm (Nominal)	350	350	350
Zero Balance-% RO	± 1.0	± 1.0	± 1.0
Insulation Resistance-Megohm	5000	5000	5000
MECHANICAL			
Safe Overload-% CAP	± 150	± 150	± 150
Deflection @ RO-inch	0.002	0.004	0.004
Deflection @ RO-mm	0.05	0.10	0.10
Base Part Number (Ref)	B101	B102	B103
Natural Frequency-kHz	4.5, 6.4	4.3, 6.1	4.1, 4.6
Weight-lb	3.3	7.3	21.5
Weight-kg	1.5	3.3	9.8
Connector	PC04E-10-6P	PC04E-10-6P	PC04E-10-6P
Calibration	Compression	Compression	Compression

OPTIONS*

Compression overload protection
Integral 10 ft cable
Multiple bridge
Bayonet Connector
Standardized output
Connector Protection

ACCESSORIES*

Mating connector
Instrumentation
Loading hardware

* See appendix for more technical information

STANDARD CONFIGURATIONS

• 10 ft Integral Cable (11xxEX-nn)
<or> PC04E-10-6P Connector (11xxHL-nn)
<or> PTO2E-10-6P Bayonet Connector (11xxBAY-nn)